




Sx-1500


HIGH FLOWABLE HIGH ELASTIC

FOR NARROW GAPS



Sealex Sx-1500 is a high quality acrylic sealant for sealing narrow joints and gaps. Sealex Sx-1500 comes with special elastic properties which flows and seeps deeply into narrow gaps.

- Permanently Flexible
- Adheres to Most Surfaces
- Paintable
- Solvent Free / Odourless / Low VOC
- Water Based
- Mold Resistance
- Non Sagging



SCAN QR CODE
FOR INFORMATION



COMPANY PROFILE


Sealex Chemical Co., Ltd. is sealant and adhesive manufacturer arm of the Inno-Cons Group of companies. Inno-Cons is a major supplier of construction material throughout the Kingdom of Thailand and South East Asia focusing on products for the construction of metal building, pre-fabricated building, aluminum & glass, precast concrete markets.

Products offered by Sealex include :

- Hybrid Sealant manufactured offering less-stain, less dirt pick-up, anti-fungus, Low VOC, paintable sealant for perimeter, wall joint, all weather applications.
- Hybrid Sealant Technology offers non-solvent, Low VOC adhesives for flooring, automotive and no-nail applications.
- High performance Silicone and Acrylic Sealants

NO. 1 ABOUT SERVICE

- **12 distribution centers** All regions in Thailand
- **Sales team** Knowledge service And application techniques
- **Customer relations team** Inquiry, order and delivery service
- **Delivery service team** With a car to deliver products to anywhere in every province (Except Yala, Narathiwat, and Pattani provinces)
- **Technical service** Expert team is available to advise for the best performance of the product.

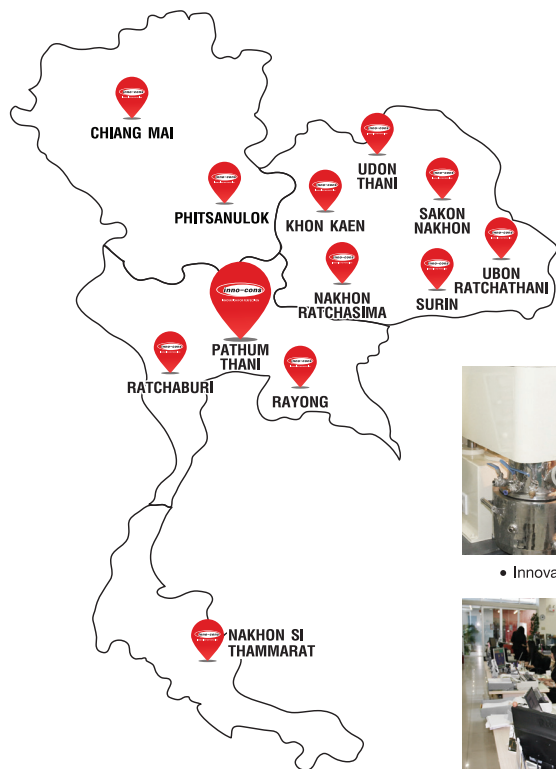

• Innovation of product




• Educating customers on new products



• On site Technical Service



• Customer Care service that our competitors and business associates speaks about

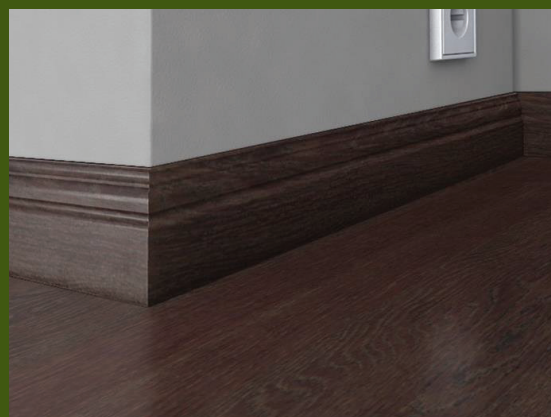

TECHNICAL SUBMITTAL

Features

Benefits

Adheres to most Surfaces and Materials	Versatility and exhibility in applications
Long Term Flexibility	Excellent adhesion to floor surfaces, laminated floorings and concretes. Suitable for use in active movement areas within the property while ensuring a long lasting flexibility and adhesions. This gives Sx-1500 more advantages over general acrylic sealants.
Isocyanate and Solvent Free	Safe to applicators and also people occupying the property in enclosed areas.
Mold Resistance	Resistance to mold suitable for sanitary apoplication
Advanced Formulation	Ideal for sealing small joints such as wall and oor cornices as it ows and seeps deeply into narrow gaps along with desirable exhibility and strong adhesions.
Paintable	Once cured can be painted with oil and non-oil based paints


Applications

• Joints between floor cornices and wall
• Seams between floor and cornices
• Sealing interior joints of build-in furniture
• Seal skirting and cornices around rooms and gaps
• Sealing cracks on plasterboards, bricks, concrete before painting
• Seal plaster and ceiling boards joins and external joints to walls

Limitation

- Avoid applications on damp surfaces as dampness significantly extends curing time.
- Avoid exposing to water until after fully cure
- Not suitable for submerged or permanently wet areas
- Not suitable for abrasive or physical abuse applications
- Do not apply externally if it is know that it will rain within 4 hours of application

Standard Color

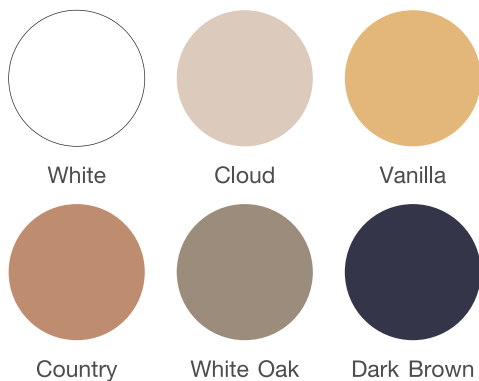

Customize Colors Available

Can request custom color

Technical Specification


	List	Data
1	Viscosity	1 rpm
		2 rpm
		10 rpm
		2/10 rpm
2	Cure depth	662066 mPa.s 478600 mPa.s 142100 mPa.s 3.36
3	Tack Free Time	3-4 mm./96 hr. @room temp.
4	Tooling Time	12 min
5	Shore A Hardness 18 Day	7 min
6	Elongation at break @Shore A 18.6 (ASTM D412 Die A)	18.6
7	Adhesion	>200%
8	S.G.	-
		1.37 g/ml.

Size of Packaging & Accessory



300 g. (Cartridge)

TECHNICAL SUBMITTAL



Bad acrylic will cause cracking problems.

LIMITED WARRANTY

The information contained in this document offered in good faith is believed to be accurate. However, as it is beyond our control on the conditions and methods of use of our products by our clients the information contained in this document should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end application.

Sealex warranties that all Sealex products meet the specifications herewith at the time of shipment. In the event of breach of such warranty Sealex is limited to refund of purchase price or replacement of any product shown to be other than as warranted.



INNO-CONS (THAILAND) CO., LTD.

78 Moo 7 Klongsi, Klongluang, Pathum Thani 12120

Tel : 02-524-0778-9 Fax : 02-524-2085-7 Website : www.inno-cons.com